

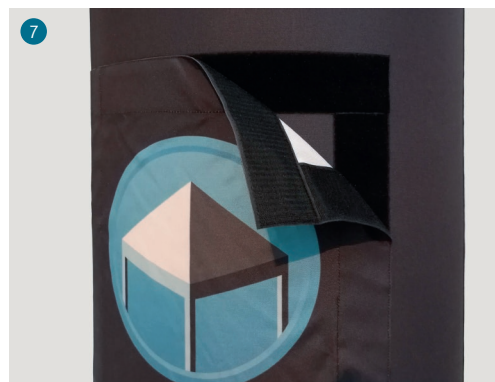


If you have a Constant Air Arch, simply unpack the arch, put into position ensuring the plug is closest to your power source, and plug in. Once inflated, tether the arch down using the D-Rings. If you have a Sealed Air Arch, please follow the instructions below:

01. Remove contents from the bag and unroll the arch with the valve closest to the power source.
02. Locate the valve and ensure both parts of the bung have been removed.
03. Set the pump to the inflate setting with the inflate / deflate nozzle attached.
04. Turn on the pump to begin inflation and ensure the nozzle is held in the valve by the user at all times.
05. You should be able to inflate the arch to almost full pressure and then you can close the valve, leaving the top up part of the valve open.
06. Use the top up valve to inflate the arch to full pressure, then turn off the pump and close the outer cap on the valve.
07. To attach a standard velcro banner, simply align the banner with the velcro on the arch and apply.
08. To attach a wraparound velcro banner, wrap the banner around the leg or top section of the arch, ensuring that the velcro aligns with the seam on either the inside or the outside of the arch, then attach the velcro on one side of the banner to the velcro on the other side of the banner when they are perfectly aligned.
09. Once the arch is fully inflated and any banners have been attached, use the D-rings to tether down the arch. Setup is now complete.

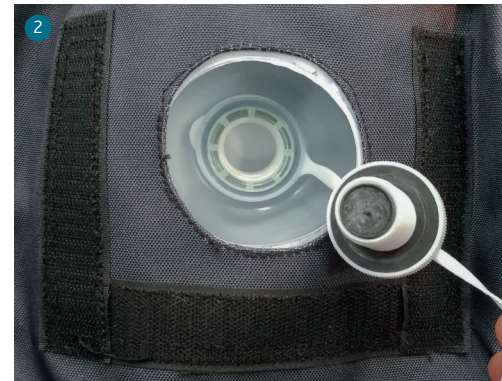

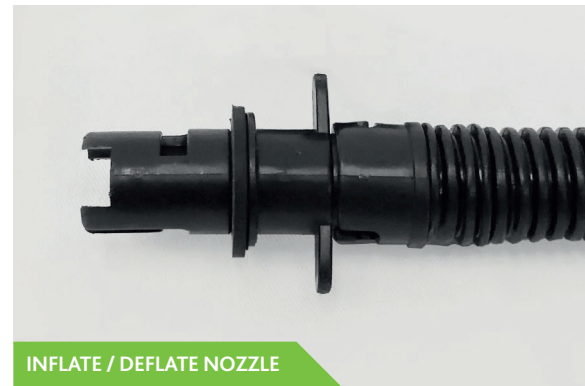

Contents

- 1 x Pump with Mains Plug
- 1 x Accordion Hose
- 1 x Inflate/Deflate Nozzle
- 1 x Top Up Nozzle

Inflation

1. Connect the Inflate/Deflate nozzle to the small end of the hose.
2. Connect the large end of the hose to the inflation port on the pump.
3. Plug the pump into a mains power supply.
4. Attach the nozzle to the valve of the inflatable product.
5. Turn on the pump's power switch to begin inflation. Never leave the pump unattended while in use.
6. After inflation, turn off the switch and disconnect the power supply.

Top Up

1. Connect the Top Up nozzle to the small end of the hose.
2. Connect the large end of the hose to the inflation port on the pump.
3. Plug the pump into a mains power supply.
4. Hold the nozzle to the valve of the inflatable product.
5. Turn on the pump's power switch to begin inflation. Never leave the pump unattended while in use.
6. After inflation, turn off the switch and disconnect the power supply.

Deflation

1. Connect the Inflate/Deflate nozzle to the small end of the hose.
2. Connect the large end of the hose to the deflation port on the pump.
3. Plug the pump into a mains power supply.
4. Attach the nozzle to the valve of the inflatable product.
5. Turn on the pump's power switch to begin deflation. Never leave the pump unattended while in use.
6. After deflation, turn off the switch and disconnect the power supply.