


01. Unzip and fold away all the walls.
02. Remove the weight plates from the zip pockets in the two back legs.
03. Unscrew the bung.
04. With a person on each of the two back legs, sweep them under the spider dome so that the unit falls into a semi-circular position.
05. Remove the remaining weight plates from the zip pockets in the two front legs.
06. Set the pump to the deflate setting with the inflate/deflate nozzle attached.
07. Turn the pump on to extract as much of the remaining air from the unit as possible, then turn off the pump, leaving the valve open.
08. Position the legs so that the leg with the valve is on its own and the remaining three legs are opposite, as shown in the picture.
09. Start rolling the dome from the base of the three legs towards the top of the dome.
10. Once rolled to the top, manoeuvre the unit so that you can continue to roll down the final leg towards the valve, removing any remaining air as you do so. Close the valve with the bung.
11. Slide the rolled up spider dome into the bag and add any walls & accessories.
12. Zip up the bag and remove the groundsheet (store separately). If the spider dome is still damp when packed away, please ensure it is dried at room temperature within 48hrs.

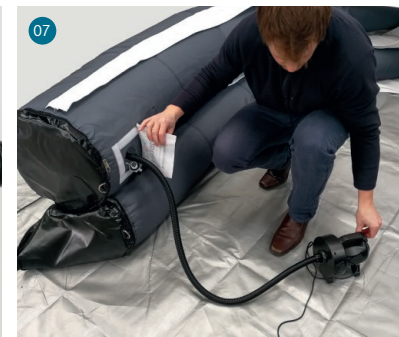

For more detailed instructions on how to use the pump, please refer to page 3.