


01. Lay out the setup groundsheet, remove the contents from the bag and roll out the spider dome in a semi-circular shape as pictured.




02. Locate a valve in one of the legs and unscrew the valve cap. If you have two valves on your unit, ensure the other valve is closed for inflation.



03. Set the pump to the inflate setting with the inflate/deflate nozzle attached.

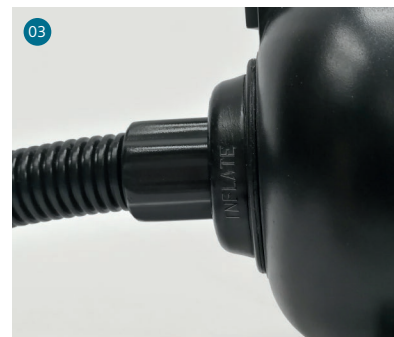

04. Insert the nozzle into the valve and twist clockwise to lock into position. Turn the pump on.

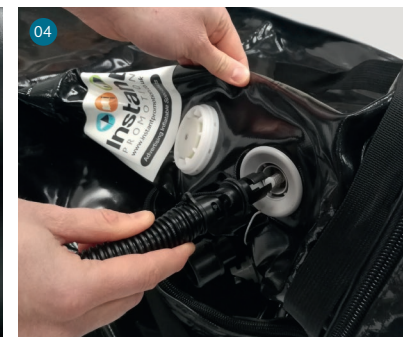

05. Once the dome is pressurised to about 80% air pressure, turn off the pump and close the valve.



06. Move to the opposite side of the dome, and with two people on the outside, pull the remaining two legs out until the dome is stood upright.



07. Using the top up function on the pump, fully pressurise the spider dome to give full structural integrity. A second person should hold the dome throughout inflation.



08. Turn off the pump and close the outer cap on the valve.



09. Insert weight plates into the zip pockets located at the base of each leg.



10. When possible, secure the dome to the ground using pegs through the D-rings on each leg.



11. If you have walls, locate the zip and attach to the dome. Zip up until the wall is fully attached to the unit and repeat with any other walls.



12. Remove the groundsheet from under the unit and setup is complete.



For more detailed instructions on how to use the pump, please refer to page 3.